



Data-sheet



Wall protection sheets
CS Acrovyn® 2 mm

version 5 | 2017

Reliable, time tested protection for walls and doors


- Acrovyn® 2 mm wall protection sheets are a reliable, time tested protection for abused walls and doors
- Acrovyn® is fully B-s2, d0 certified
- Available in 40 beautiful, standard solid colours
- Gardner impact tests have shown that Acrovyn is more impact resistant than competing wall protection sheets
- Acrovyn® is the only wall protection sheet on the market to be manufactured in compliance with RoHS standards
- CS factory custom size cutting service
- Certified for ease of cleaning by the Louis Pasteur Institute



CHARACTERISTICS



Acrovyn® sheets have been certified by SaniVap to be suitable for hot steam cleaning procedures with 150° C hot steam at 5 bar pressure.



DIMENSIONS

1.300 x 3.000 x 2 mm



Acrovyn® sheets were certified by the renowned Louis Pasteur Institute for their bacteriostatic properties and ease of cleaning.



Acrovyn® wall protection sheets have been fire rated B-s2, d0 in compliance with the European norm NF 13501-1



Impact resistance using the Gardner Impact Testing method proved that Acrovyn® sheets are incredibly strong, beating in strength competing wall protection sheets.

MORE INFORMATION: www.c-sgroup.eu/?p=414

Product description

Supply and installation of the **Acrovyn® wall protection sheets** from **CS France**, with 2 mm mm thickness and a maximum size of 1.300 x 3.000 mm or factory cut to any custom size.

The sheets are fixed to the wall with contact glue or double sided adhesive tape.

Acrovyn® possesses **excellent scratch resistance and outstanding shock absorbercy** properties, has a finely grained surface, is non-porous and dyed through.

Acrovyn® wall protection sheets have been **fire rated B-s2, d0** in compliance with the European norm NF 13501-1. Test reports can be provided upon request.

Following the European norm NF EN ISO 1716 the **Higher Heating Value (HHV)** was been determined to be **17,828 MJ/kg**. Test reports can be provided upon request.

Acrovyn® wall protection sheet was tested on **indoor VOC emissions** (indoor volatile organic compounds emissions) and **certified with A+**. Test reports can be provided upon request.

Acrovyn® wall protection sheets are **inert, non contaminant and can be 100% recycled**.


Acrovyn® wall protection sheets are being **manufactured in compliance with the European Directive 2002/95 / EC or RoHS**.

The following accessories and options are available: 45° or rounded bevel cut, superior finishing trim in Acrovyn® or brushed aluminium, vertical Acrovyn® trim, Acrovyn® plinth with flexible lip, factory applied adhesive strips for quick and factory cutting service to any custom size.


The manufacturer CS France offers a choice of **40 standard solid colours**.




Components and accessories

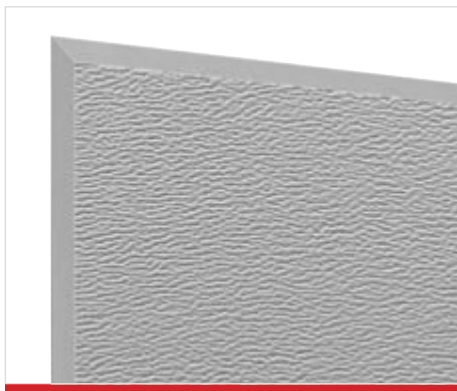

Acrovyn® sheets possess a finely grained surface texture and are available in standard sizes of 1.300 x 3.000 x 2 mm.

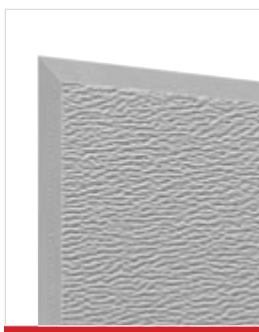


45° edge bevelling

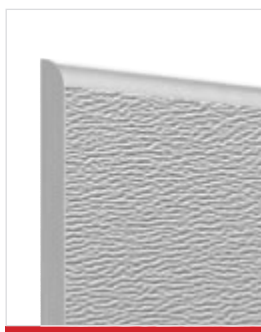

Round edge bevelling



Upper finishing trim in Acrovyn®

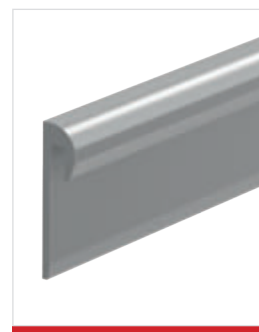


Upper finishing trim in brushed Aluminium



Vertical trim in Acrovyn®



Acrovyn® plinth CB 100 with flexible lip

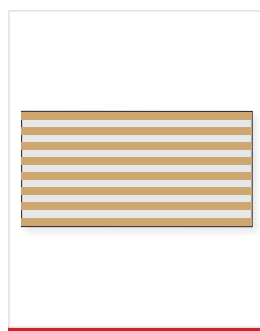

Factory applied adhesive strips for effortless on-site mounting



Factory cut to any custom size

Colour range

Colour sample service

The colour representations on this chart might not be exact and can deviate from the real colours.

For best results we recommend to make your colour choice based on real samples.

Please contact our Customer Services Department or local distributor.

