

MOBILE SPORTS & COVER FLOORS

SPEED-LOCK[®]
Mobile Sports + Cover Floors

SPEED-LOCK[®]
SPORTSFLOORING PARTS+DESIGN

manufactured by **HOLZ SPECKMANN** Germany



Company Location Halle/Westfalen, Germany

Quality made in Germany

Our international references demonstrate the advantages of the Speed-Lock mobile floors: Quick assembly, high durability and longevity. Speed-Lock mobile sports floors are manufactured according to DIN 18032 and EN 14904 standards and can be fitted with a variety of surfaces, such as parquet wood, linoleum or vinyl.

The mobile floor design is based on our 145 years know-how and experience in wood manufacturing and processing. The floor elements are manufactured to a high level of precision using the latest CNC machinery. The patented safe, sturdy aluminium interlocking system ensures the system's long life.

Speed-Lock Sports Floors

| | |
|---------------------------------------|----|
| Basketball | 4 |
| Handball | 6 |
| Volleyball | 10 |
| Mobile Subconstruction / Stage Floors | 12 |
| Dance | 14 |
| Accessories and Custom-made Products | 16 |

Speed-Lock Cover Floors

| | |
|-----------|----|
| Ice Cover | 18 |
| Cover | 22 |

Speed-Lock Flex Panel

| | |
|-----------------------|----|
| Flex Panel 36 Parquet | 24 |
| Flex Panel Basic | 26 |

SPEED-LOCK® Basketball

Mobile Sports + Cover Floors

manufactured by **HOLZ SPECKMANN** Germany




Berlin Germany

© Camera4


References **Basketball**

- Mercedes-Benz Arena, Berlin, Germany
- Bobcat Arena, Frostburg, MD, USA
- Steppe Arena, Ulaanbaatar, Mongolia
- KIA Metropol Arena, Nürnberg, Germany
- Stadium 29, Bangkok, Thailand
- edel-optics.de Arena, Hamburg, Germany
- Arena Naestved, Naestved, Denmark
- AIS Arena, Canberra, Australia
- EWE Arena, Oldenburg, Germany
- s. Oliver Arena, Würzburg, Germany
- Tromso Arena, Tromso, Norway
- Nokian Palloiluhalli, Nokia, Finland
- Oberfrankenhalle, Bayreuth, Germany
- SNP dome, Heidelberg, Germany
- Basketball Academie Limburg, Weert, Netherlands
- Maaspoort, 's-Hertogenbosch, Netherlands
- Raiffeisen Sportpark, Graz, Austria
- Arena Ludwigsburg, Ludwigsburg, Germany
- Hakro Arena, Crailsheim, Germany
- Coliseum Burgos, Burgos, Spain
- Deutenberghalle, Villingen-Schwenningen, Germany
- Sparkassen Arena, Göttingen, Germany
- Stadthalle Weißenfels, Weißenfels, Germany
- Messehallen, Chemnitz, Germany

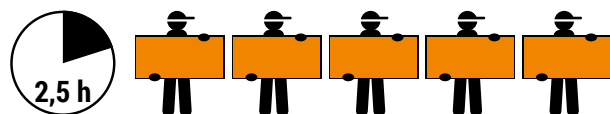

600 m² in 2,5 hours

A basketball court of 600 m² can be installed by 5 fitters in 2.5 hours.

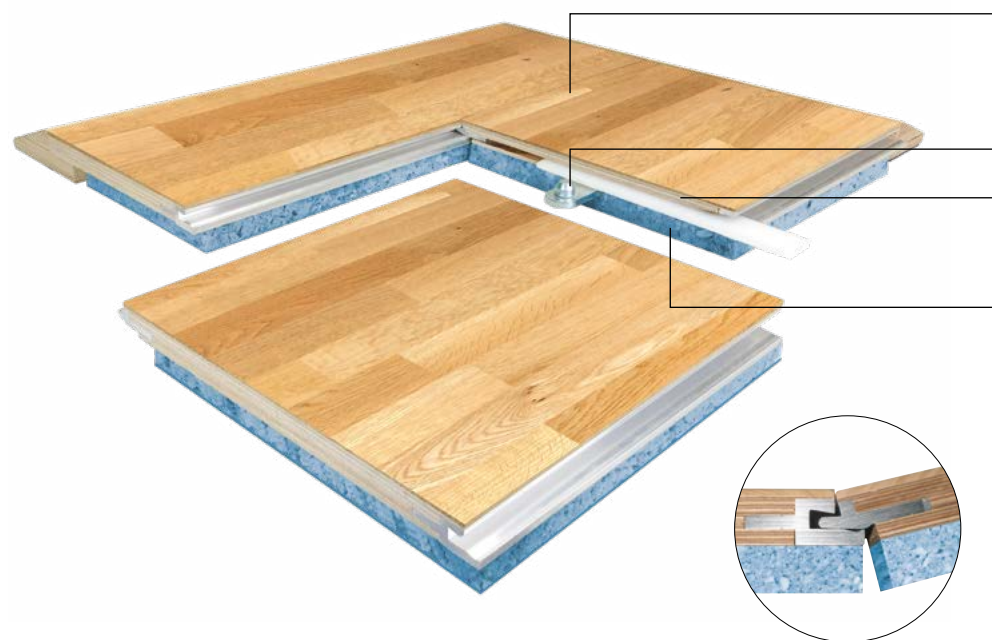

Speed-Lock S20

The area elastic mobile sports floor **Speed-Lock S20** is the uncompromising development of the Speed-Lock sports series. The patented Speed-Lock aluminium interlocking system and the low weight of the modules ensure a most safe and easy handling.

Top Layer

Wood Species: oak and hard maple
3.6 mm parquet wear layer in shipdeck design, factory sealed

Head joint with hook and eye and plastic connector

Middle Layer

15 mm birch special plywood according with EN 13986 - EN 636-2S

Elastic Layer

18 mm laminate composite foam with PE film

Thickness

approx. 37 mm

Module Size

L 2470 x W 613 mm (1,51 m² per module)

Interlocking System

patented Speed-Lock aluminium connectors

Certification

DIN V 18032-2:2001-04 and EN 14904:2006

Weight

approx. 24 kg per module, approx. 16 kg/m²



Transport and Storage

11 Pallets à L 2540 x W 800 x H 2000 mm, stackable

Storage Area

approx. 12,5 m² (22,5 m² unstacked)

Available Wood Species

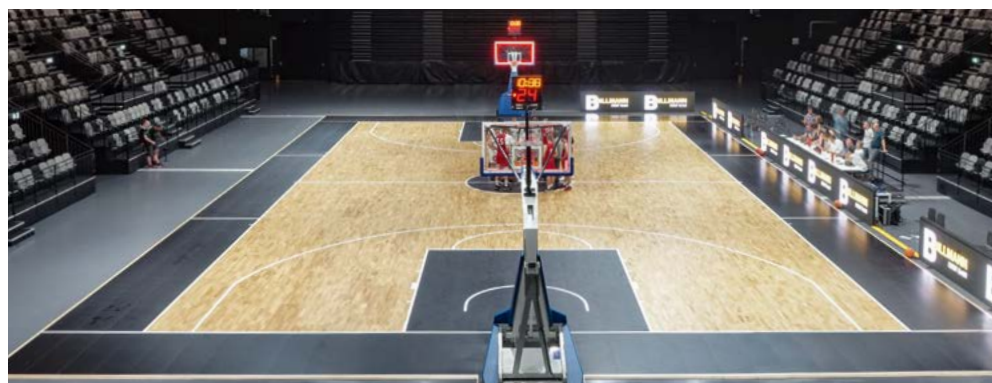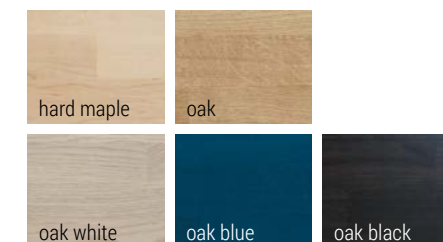

Nürnberg Germany



Frostburg State University USA

SPEED-LOCK® Handball

Mobile Sports + Cover Floors

manufactured by **HOLZ SPECKMANN** Germany




Nürnberg Germany

References Handball

- Wunderino Arena, Kiel, Germany
- Antel Arena, Montevideo, Uruguay
- Barclaycard Arena, Hamburg, Germany
- Arena Minsk, Minsk, Belarus
- Arena Nürnberger Versicherung, Nürnberg, Germany
- Max-Schmeling-Halle, Berlin, Germany
- Velodromo Nacional, Sangalhos, Portugal
- Friedrich-Ebert-Halle, Ludwigshafen, Germany
- Valdres Storhall, Leira, Norway
- Rothenbach-Halle, Kassel, Germany
- Sporthalle, Hollabrunn, Austria
- SBBS Sporthalle Erfurt, Erfurt, Germany
- Arena Leipzig, Leipzig, Germany
- Ville de Differdange, Luxembourg
- Emslandhallen, Lingen, Germany
- Lillehammer, Hakons Hall, Norway
- Sport & Kongresszentrum, Schwerin, Germany
- Le Phare Chambéry, Chambéry, France
- MSH-Arena, Sofia, Bulgaria
- Holstenhallen, Neumünster, Germany
- Park & Suites Arena, Montpellier, France
- Hala Sportowa, Torun, Poland
- Palladium Arena, Zrenjanin, Serbia
- Kongsvingerhallen, Kongsvinger, Norway
- EgeTransArena, Bietigheim-Bissingen, Germany

Speed-Lock M1

Speed-Lock M1 – The high level competition floor all in one: A point elastic top layer is factory applied on an area elastic mobile subfloor enhancing the athlete's performance and safety. A wide range of colours and various designs are available to comply with international standards.

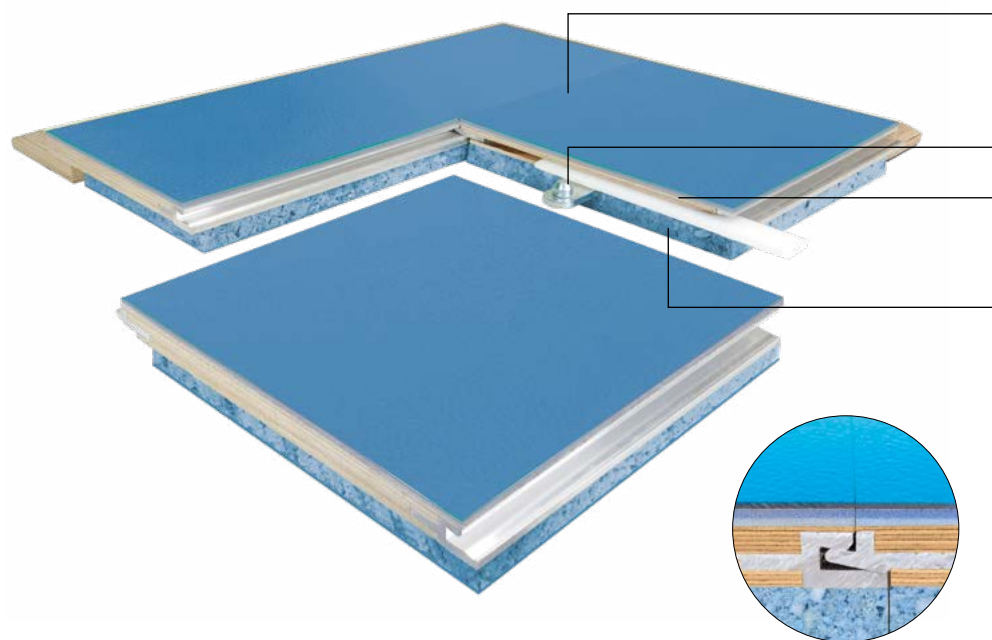

Top Layer

Available Colors: according with current pattern range
7,5 mm PVC sports floor, FIBA, FIVB, IHF approved

Head joint with hook and eye and plastic connector

Middle Layer

18 mm birch special plywood according with EN 13986 - EN 636-2S

Bottom Layer

18 mm laminate composite foam with PE film

Thickness

approx. 43 mm

Module Size

L 2470 x W 613 mm (1,51 m² per module)

Interlocking System

patented Speed-Lock aluminium connectors

Certification

DIN V 18032-2:2001-04 and EN 14904:2006

Weight

approx. 30 kg per module, approx. 20 kg/m²

Transport and Storage

18 Pallets à L 2540 x W 800 x H 2000 mm, stackable

Storage Area

approx. 18,5 m² (36,5 m² unstacked)



Berlin Germany



Kiel Germany

SPEED-LOCK® Handball


Mobile Sports + Cover Floors

manufactured by HOLZ SPECKMANN Germany




References Handball

- Wunderino Arena, Kiel, Germany
- Antel Arena, Montevideo, Uruguay
- Barclaycard Arena, Hamburg, Germany
- Arena Minsk, Minsk, Belarus
- Arena Nürnberger Versicherung, Nürnberg, Germany
- Max-Schmeling-Halle, Berlin, Germany
- Velodromo Nacional, Sangalhos, Portugal
- Friedrich-Ebert-Halle, Ludwigshafen, Germany
- Valdres Storhall, Leira, Norway
- Rothenbach-Halle, Kassel, Germany
- Sporthalle, Hollabrunn, Austria
- SBBS Sporthalle Erfurt, Erfurt, Germany
- Arena Leipzig, Leipzig, Germany
- Ville de Differdange, Luxembourg
- Emslandhallen, Lingen, Germany
- Lillehammer, Hakons Hall, Norway
- Sport & Kongresszentrum, Schwerin, Germany
- Le Phare Chambéry, Chambéry, France
- MSH-Arena, Sofia, Bulgaria
- Holstenhallen, Neumünster, Germany
- Park & Suites Arena, Montpellier, France
- Hala Sportowa, Torun, Poland
- Palladium Arena, Zrenjanin, Serbia
- Kongsvingerhallen, Kongsvinger, Norway
- EgeTransArena, Bietigheim-Bissingen, Germany

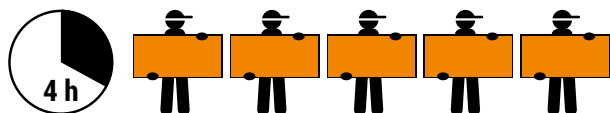

1000 m² in 4 hours

A handball court of 1000 m² can be installed by 5 fitters in 4 hours.

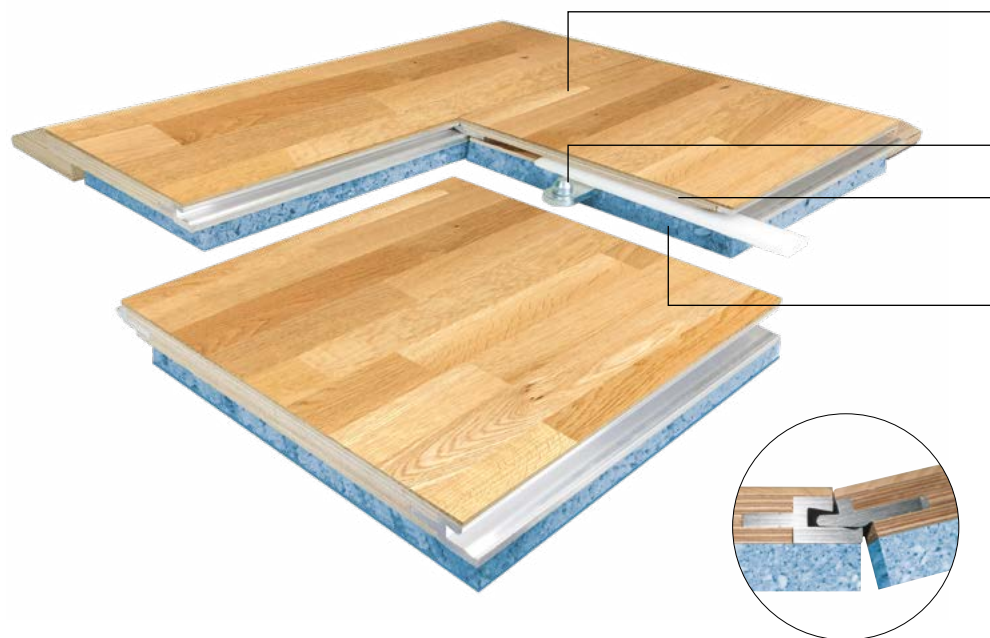

Speed-Lock S20

Speed-Lock S20 has a unique seamless parquet wear layer with a sturdy varnishing. It is a highly resistant premium sports floor for utmost demands, fast to install and easy to clean.

Top Layer

Wood Species: hard maple and oak
3.6 mm parquet wear layer in shipdeck design, factory sealed

Head joint with hook and eye and plastic connector

Middle Layer

15 mm birch special plywood according with EN 13986 - EN 636-2S

Elastic Layer

18 mm laminate composite foam with PE film

Thickness

approx. 37 mm

Module Size

L 2470 x W 613 mm (1,51 m² per module)

Interlocking System

patented Speed-Lock aluminium connectors

Certification

DIN V 18032-2:2001-04 and EN 14904:2006

Weight

approx. 24 kg per module, approx. 16 kg/m²

Transport and Storage

18 Pallets à L 2540 x W 800 x H 2000 mm, stackable

Storage Area

approx. 18,5 m² (36,5 m² unstacked)



Lillehammer Norway



Montevideo Uruguay

SPEED-LOCK® Volleyball

Mobile Sports + Cover Floors


manufactured by **HOLZ SPECKMANN** Germany



© Christian Forcher


References **Volleyball**

- Arena Narbonne, France
- Max-Schmeling-Halle, Berlin, Germany
- Arena, Anapa, Russia
- Messe, Friedrichshafen, Germany
- Saalsporthalle, Volero Zurich, Switzerland
- SSC Schwerin, Germany
- Turgutlu Sports Arena, Turgutlu-Manasia, Turkey
- BBC Arena, VC Kanti Schaffhausen, Switzerland
- Messe Sinsheim, Germany
- Swiss Volley Bern, Switzerland
- Salle Multimodale, Narbonne, France
- Lugano Dragons, Lugano, Switzerland
- Lagardere, Aix en Provence, France
- FIVB Club Championship Eventcourt, Basel, Switzerland
- GCDW, Herrsching, Germany
- Universitätssporthalle Innsbruck, Austria

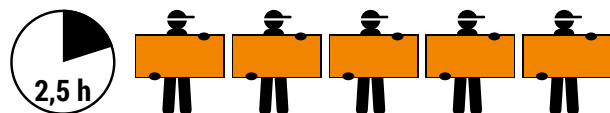

600 m² in 2,5 hours

A volleyball court of 600 m² can be installed by 5 fitters in 2,5 hours.

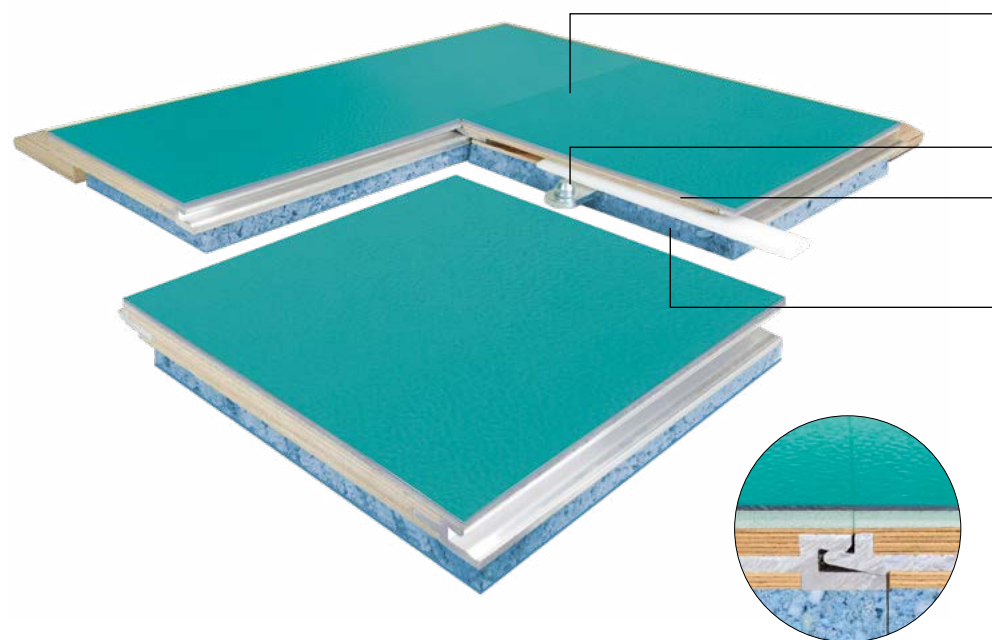

Speed-Lock M1

The combi-elastic **Speed-Lock M1** ensures best performance for high competition tournaments. The installation can be carried out directly on flat concrete surfaces transforming every arena into a first class sports venue.

Top Layer

Available Colors: according with current pattern range
7,5 mm PVC sports floor,
FIBA, FIVB, IHF approved

Head joint with hook and eye and plastic connector

Middle Layer

18 mm birch special plywood according with EN 13986 -
EN 636-2S

Elastic Layer

18 mm laminate composite foam with PE film

Thickness

approx. 43 mm

Module Size

L 2470 x W 613 mm (1,51 m² per module)

Interlocking System

patented Speed-Lock aluminium connectors

Certification

DIN V 18032-2:2001-04 and EN 14904:2006

Weight

approx. 30 kg per module, approx. 20 kg/m²

Transport and Storage

11 Pallets à L 2540 x W 800 x H 2000 mm, stackable

Storage Area

approx. 12,5 m² (22,5 m² unstacked)



Friedrichshafen Germany



Schaffhausen Switzerland

SPEED-LOCK[®]
Mobile Sports + Cover Floors
manufactured by HOLZ SPECKMANN Germany


Mobile Subconstruction / Stage Floors



Cologne Germany


References Mobile Subconstruction

- Velux EHF Final 4, Cologne, Germany
- Centre Sportif d'Oberkorn, Differdange, Luxembourg
- Royal Arena, Copenhagen, Denmark
- Stadthalle St. Ingbert, St. Ingbert, Germany
- Bühnen der Stadt Cologne, Cologne, Germany
- KunstFestSpiele, Hannover, Germany

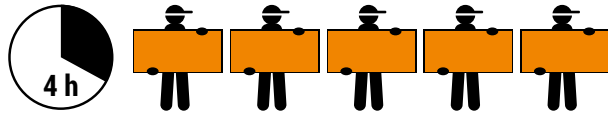

1000 m² in 4 hours

A handball court of 1000 m² can be installed by 5 fitters in 4 hours.

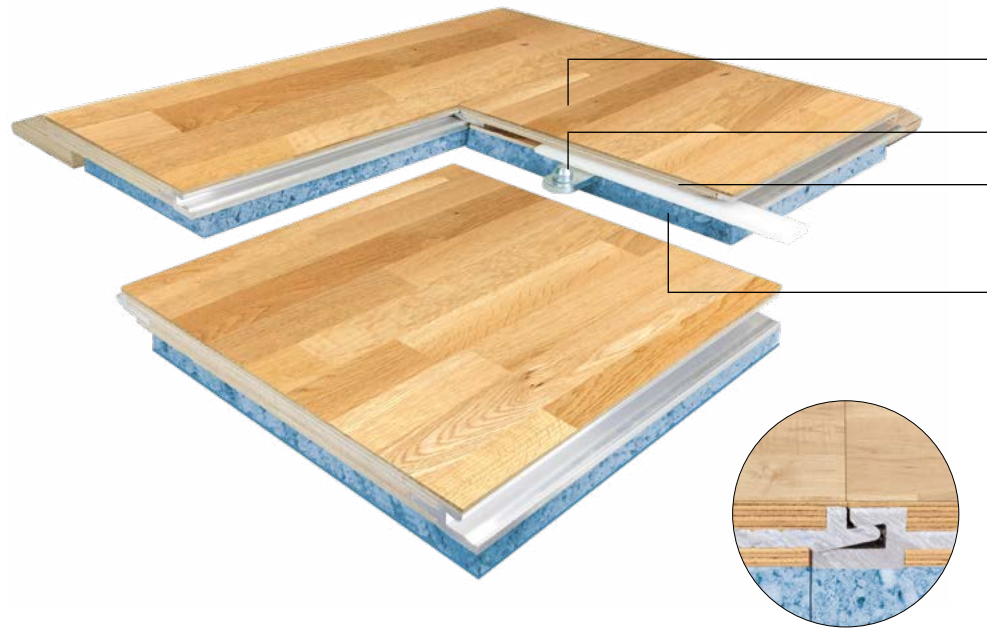

Speed-Lock Basic / Basic Design

Speed-Lock Basic: The mobile or semi-permanent subflooring system for any rolled sports floors. It is quick and easy to install and is the ideal choice for many sporting events. The Speed-Lock Basic offers the features of an area-elastic or combi-elastic sports floor, always achieving a perfect quality.

The decor of the **Speed-Lock Basic Design** is made of a direct printing process. The great optical wood design is cured with a premium sports varnish.

Surface

A direct printing design process with a premium sports varnish

Interlocking System

patented Speed-Lock aluminium connectors

Head joint with hook and eye and plastic connector

Weight approx. 24 kg per module, approx. 16 kg/m²

Load Distribution Board

18 mm birch special plywood according with EN 13986 - EN 636-2S

Elastic Layer

18 mm laminate composite foam with PE film

Thickness


approx. 36 mm

Module Size

L 2470 x W 613 mm (1,51 m² per module)



Cologne Germany

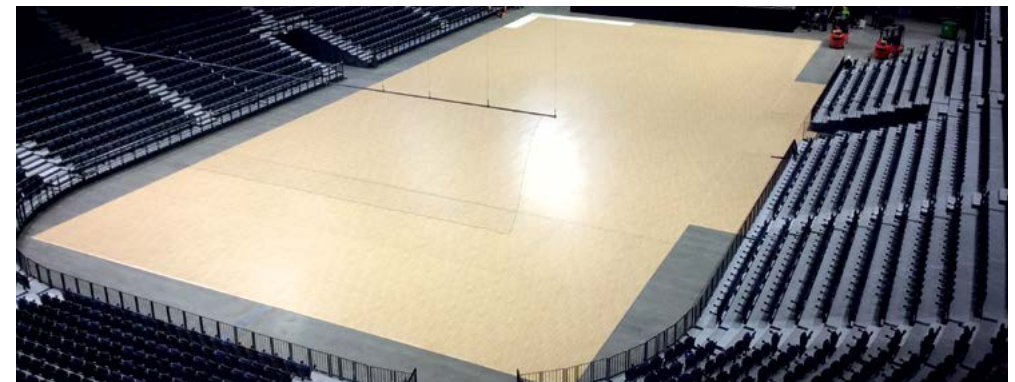

Copenhagen Denmark

SPEED-LOCK®

Mobile Sports + Cover Floors

manufactured by HOLZ SPECKMANN Germany

Dance



References Dance

Arena Klosters, Klosters-Serneus, Switzerland

Multiversum Wien, Austria

Gundelsheim, Germany

Sportizon, Belgium

Breakdance Championships, Moscow, Russia

Scania, Södertälje, Sweden

Weissach im Tal, Germany

Volkshochschule, Paderborn, Germany

Stadthalle, Bielefeld, Germany


Holstenhallen, Neumünster, Germany

Sentralen, Oslo, Norway

Pensiunea Tony, Tatarani, Romania

Café zur Düne, Grömitz, Germany

College Anita Conti, Lorient, France

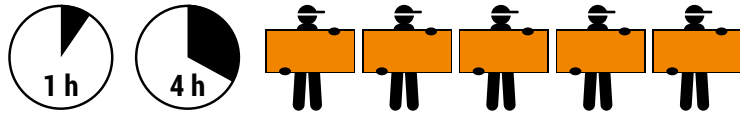


200 m² in 1 hour

Dance: A dancefloor of 200 m² can be installed by 5 fitters in 1 hour.

1000 m² in 4 hours

Dance Pro: A dancefloor of 1000 m² can be installed by 5 fitters in 4 hours.

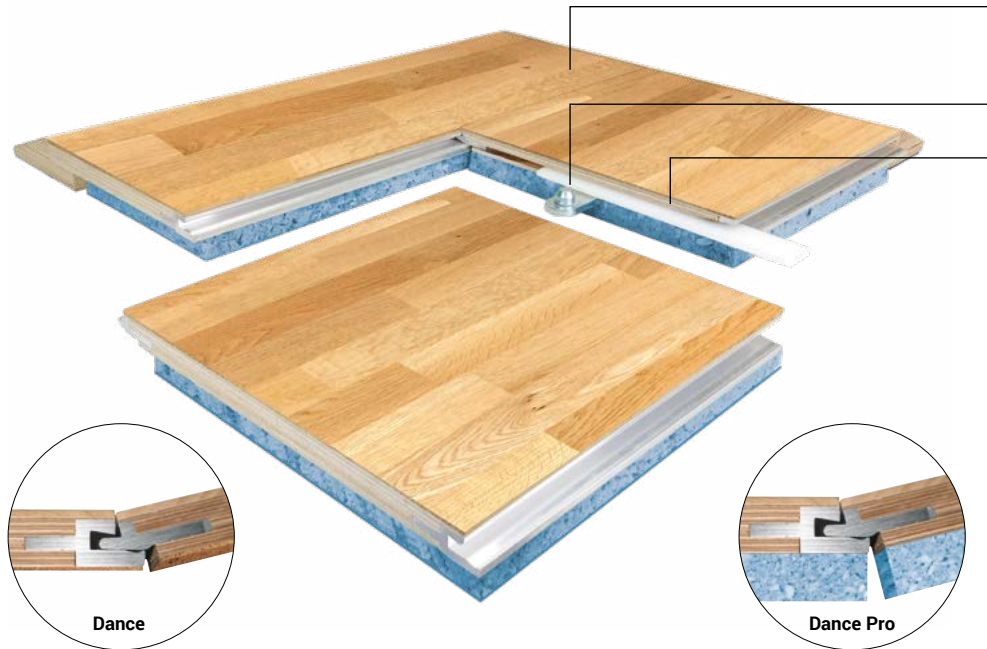

Speed-Lock Dance

Speed-Lock Sport Dance The ideal floor for dancing events with a fast installation process. A great parquet look with superb high resistance properties.

Top Layer

Wood Species: hard maple and oak
3.6 mm parquet wear layer in shipdeck design, factory sealed

Head joint with hook and eye and plastic connector

Middle Layer

15 mm birch special plywood according with EN 13986 - EN 636-2S

Unterlage 2 mm cork

Thickness approx. 21 mm

Module Size

L 2470 x W 613 mm (1,51 m² per module)

Interlocking System patented Speed-Lock aluminium connectors

Weight approx. 21 kg per module, approx. 14 kg/m²

Speed-Lock Dance Pro

Speed-Lock Dance Pro provides shock absorption and accurate slip resistance with maximum comfort for breakdance and physical dancing.

Top Layer

Wood Species: hard maple and oak
3.6 mm parquet wear layer in shipdeck design, factory sealed

Head joint with hook and eye and plastic connector

Middle Layer

15 mm birch special plywood according with EN 13986 - EN 636-2S

Elastic Layer 18 mm laminate composite foam with PE film

Thickness approx. 37 mm

Module Size L 2470 x W 613 mm (1,51 m² per module)

Interlocking System patented Speed-Lock aluminium connectors


Weight approx. 24 kg per module, approx. 16 kg/m²

Certification

DIN V 18032-2:2001-04 and EN 14904:2006




Frankfurt Germany

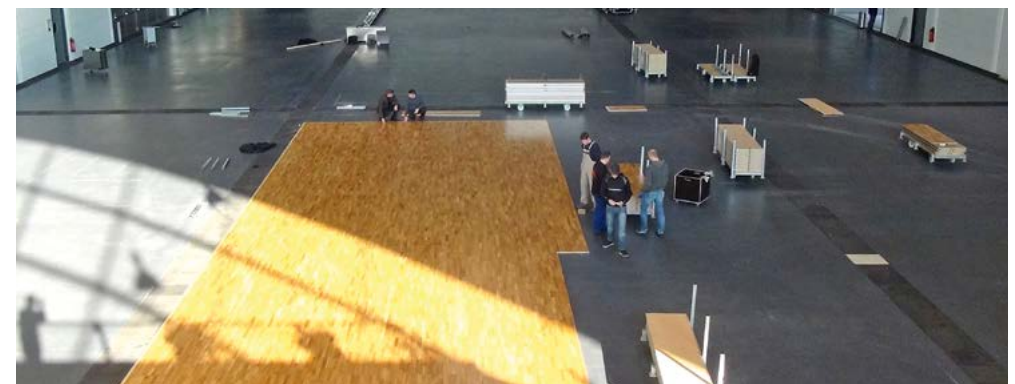

Bielefeld Germany

Transport and Storage

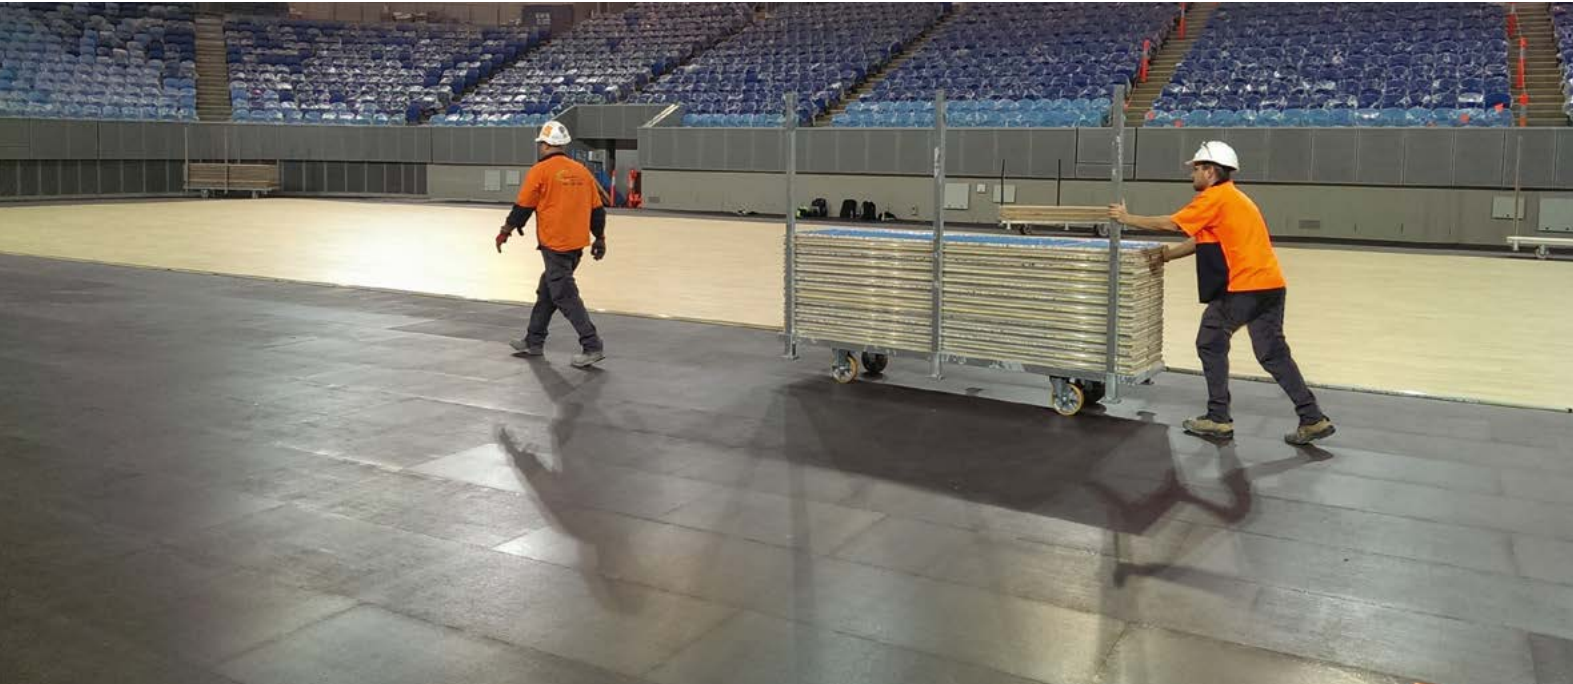

Metal Pallets during installation



Metal Pallets stacked



Metal Pallets with tension belts

| | Basketball | Handball | Volleyball |
|-------------------------------------|--|--|--|
| Required Pallets | 11 | 18 | 11 |
| Pallet Dimension (L x W x H) | 2540 x 800 x 2000 mm | 2540 x 800 x 2000 mm | 2540 x 800 x 2000 mm |
| Storage Area (unstacked) | approx. 12,5 m ² (22,5 m ²) | approx. 18,5 m ² (36,5 m ²) | approx. 12,5 m ² (22,5 m ²) |
| Court Dimension | approx. 600 m ² | approx. 1000 m ² | approx. 600 m ² |


Metal Pallets

Affordable transport and storage solutions are available. A large choice of metal pallets allow an easy loading and dismantling of the mobile Speed-Lock modules. To safe storage room, the pallets are stackable. Upon request the pallets can be equipped with heavy-duty castors.

Custom-built Design



Mobile Speed-Lock Squash Courts

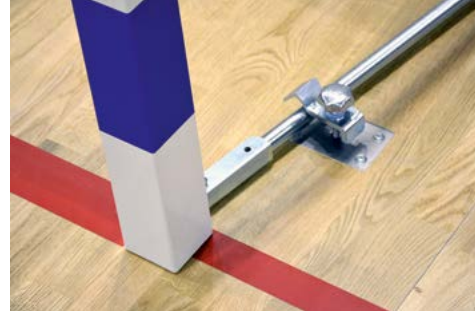

Factory-made anchoring devices

Individual Solutions

High-precision customized solutions are manufactured using the latest CNC machinery. Our permanent quality control guarantees the high quality and longevity of our flooring systems. We are able to provide customer-specific solutions upon request.

- Mobile Speed-Lock squash courts with special surface texture.
- For every sport a technical solution: **Speed-Lock Judo** with customized border.
- **Factory-made anchoring devices** for goals and basketball backstops.
- Custom-built Speed-Lock modules assure perfect adjustment of the **volleyball net poles**.



Speed-Lock Table Tennis



Custom-built Speed-Lock Modules



Speed-Lock Judo



SpeedCourt



SpeedCourt

SPEED-LOCK Ice-Cover Pro

Mobile Sports + Cover Floors


manufactured by **HOLZ SPECKMANN** Germany



Cologne Germany


References **Ice-Cover Pro**

- Mercedes-Benz Arena, Berlin, Germany
- Lanxess Arena, Cologne, Germany
- Arena Karlskrona, Karlskrona, Sweden
- SAP Arena, Mannheim, Germany
- Patinoire de Bourges, Bourges, France
- ISS Dome, Düsseldorf, Germany
- Ice Stadium, Baranovichi, Belarus
- Scania Arena, Duisburg, Germany
- EgeTransArena, Bietigheim-Bissingen, Germany
- Eissporthalle Frankfurt, Frankfurt, Germany
- Patinoire Chatellerault, Chatellerault, France
- Emscher-Lippe-Halle, Gelsenkirchen, Germany
- Eisstadion, Bremerhaven, Germany

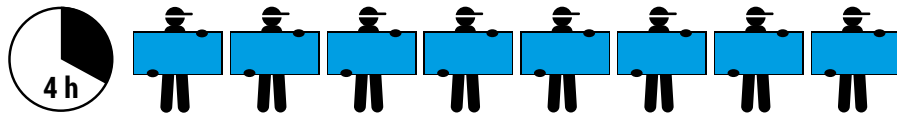

1800 m² in 4 hours

An ice rink of 1800 m² can be installed by 8 fitters in 4 hours.

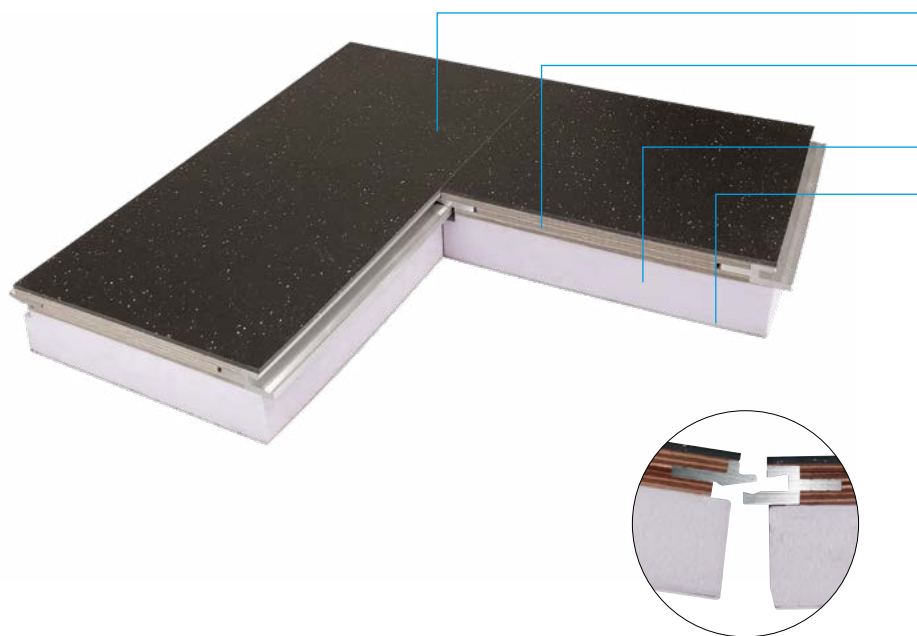

Speed-Lock Ice-Cover Pro

Speed-Lock Ice Cover Pro will convert your ice arena into a multifunctional arena within a very short time frame. The rubber top layer provides a decorative design along with a perfectly warm, comfortable and easy to clean floor. Due to the high insulation value, sports floors can be installed on the Speed-Lock Ice Cover System for a longer period of time. The dew point does not move to the surface of the ice cover floor or into the sports floor construction.

Top Layer 3 mm rubber with reflection-breaking surface

Load Distribution Board 18 mm birch special plywood according with EN 13986 - EN 636-2S

Insulating Layer 45 mm XPS polystyrene rigid foam

Bottom Layer 0.4 mm hard PVC

Thickness approx. 67 mm

Module Size L 2400 x W 600 mm (1,44 m² per module)

Interlocking System patented Speed-Lock aluminium connectors

Weight approx. 32 kg per module, approx. 22 kg/m²

Heat Transition Coefficient approx. 0,69 W/(m²K)

Thermal Resistance approx. 1,44 m²K/W

Reaction to Fire Classification Bfl-s1 EN 13501:2010

Load Bearing Capacity Forklifts and other equipment with 10 tons including load

Transport and Storage

25 Pallets à L 2440 x W 1420 x H 2000 mm, stackable
Storage Area, unstacked approx. 45 m² (87 m² unstacked)
 approx. 174 m³

INSULATION VALUE


Ice Temperature -7°C

Room Temperatur +18°C

Relative Air Humidity 45%

Speed-Lock Surface Temperatur +12°C

Available Colors

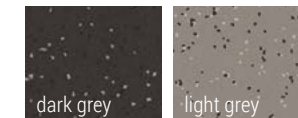

Berlin Germany



Mannheim Germany


SPEED-LOCK[®]
Mobile Sports + Cover Floors
manufactured by HOLZ SPECKMANN Germany

Ice-Cover Basic




References Ice-Cover Basic

- Tissot Arena, Biel/Bienne, Switzerland
- MEGA Shopping Mall, Samara, Russia
- Ice Hockey Arena, Frýdek Místek, Czech Republic
- Cornèr Arena, Lugano, Switzerland
- Bodensee-Arena, Kreuzlingen, Switzerland
- Patinoire d'Ycoor, Crans Montana, Switzerland
- Gap Ice Arena, France
- Ljungby Arena, Sweden
- Aren'Ice, Cergy, France
- Coliseum d'Amiens, Amiens, France
- Angers ICEPARC, Angers, France

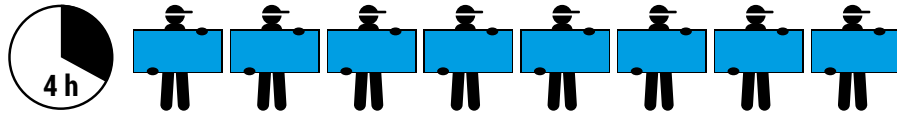

1800 m² in 4 hours

An ice rink of 1800 m² can be installed by 8 fitters in 4 hours.

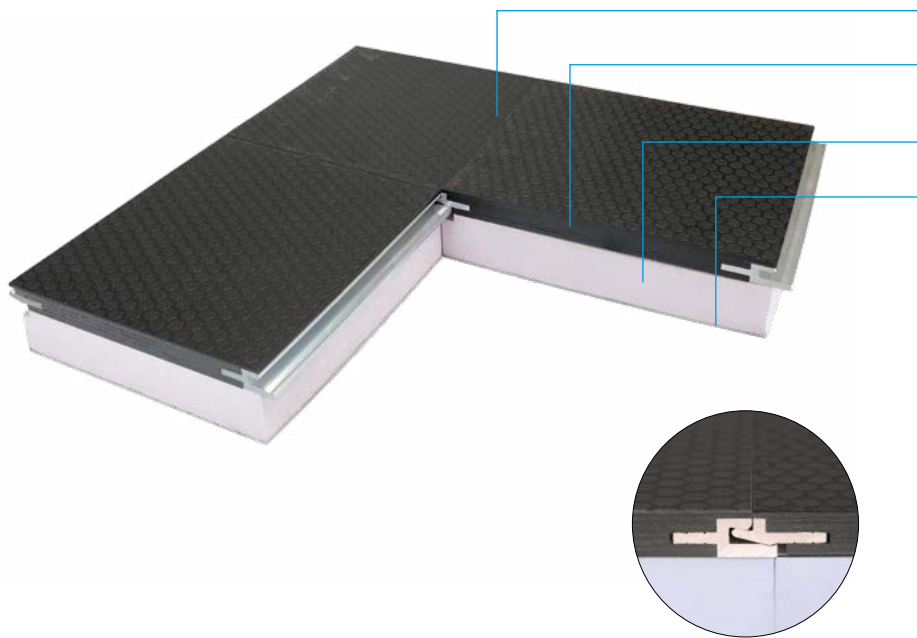

Top Layer 220 g phenol resin coating

Load Distribution Board 18 mm birch special plywood according with EN 13986- EN 636-2S

Insulating Layer 45 mm XPS polystyrene rigid foam

Bottom Layer 0.4 mm hard PVC

Thickness approx. 64 mm

Module Size L 2400 x W 600 mm (1,44 m² per module)

Interlocking System patented Speed-Lock aluminium connectors

Weight approx. 28 kg per module, approx. 19,5 kg/m²

Heat Transition Coefficient approx. 0,7 W/(m²K)

Thermal Resistance approx. 1,43 m²K/W

Reaction to Fire Classification Bfl-s1 EN 13501:2010

Load Bearing Capacity Forklifts and other equipment with 10 tons including load

Transport and Storage

25 Pallets à L 2440 x W 1420 x H 2000 mm, stackable
Storage Area, unstacked approx. 45 m² (87 m² unstacked)
 approx. 174 m³

INSULATION VALUE

Ice Temperature -7°C

Room Temperatur +18°C

Relative Air Humidity 45%

Speed-Lock Surface Temperatur +12°C

Available Colors



nub pattern
surface black



Mannheim Germany



Ljungby Sweden

SPEED-LOCK® Cover


Mobile Sports + Cover Floors
manufactured by **HOLZ SPECKMANN** Germany



Luxembourg



References **Cover**

- Mercedes-Benz Arena, Berlin, Germany
- Barclaycard Arena, Hamburg, Germany
- Centre Sportif et Culturel, Coque, Luxembourg
- Holiday on ICE Production, Shiphol, Netherlands
- Volero, Zürich, Switzerland
- Swiss Volley, Bern, Switzerland
- Hanns-Martin-Schleyer Halle, Stuttgart, Germany
- Margaret Court Arena, Melbourne, Australia
- Sydney Olympic Park, Sydney, Australia
- Arena Klosters, Klosters-Serneus, Switzerland
- Melbourne Olympic Parks, Melbourne, Australia

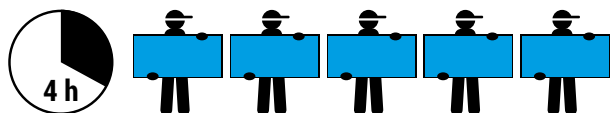

1000 m² in 4 hours

An area of 1000 m² can be installed by 5 fitters in 4 hours.

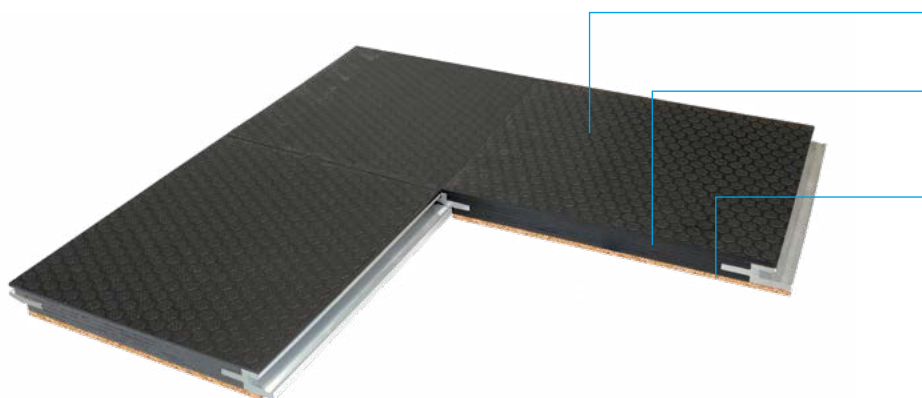

Speed-Lock Cover

Speed-Lock Cover is the universally usable and durable cover flooring for every surface. The stable resin coating on the top of the modules makes the **Speed-Lock Cover** the first choice.

Top Layer

220 g phenol resin coating

Load Distribution Board

18 mm birch special plywood according with EN 13986-EN 636-2S

Bottom Layer (optional)

cork, 2 mm or cellular rubber

Thickness

approx. 20 mm

Module Size

L 2480 x W 620 mm (1,54 m² per module)

Interlocking System

patented Speed-Lock aluminium connectors

Weight

approx. 21 kg per module, approx. 14 kg/m²

Available Colors



Melbourne Australia



Luxembourg


SPEED-LOCK[®]
SPORTSFLOORING PARTS+DESIGN

Flex Panel 36 Parquet



Speed-Lock Flex Panel 36 Parquet

Flex Panel 36 Parquet is a permanent parquet sports flooring which provides several advantages: The high precision double tongue-and-groove panel junction ensures fast and easy installation while the seamless top layer of each panel is factory sealed and therefore ready to use immediately after installation.

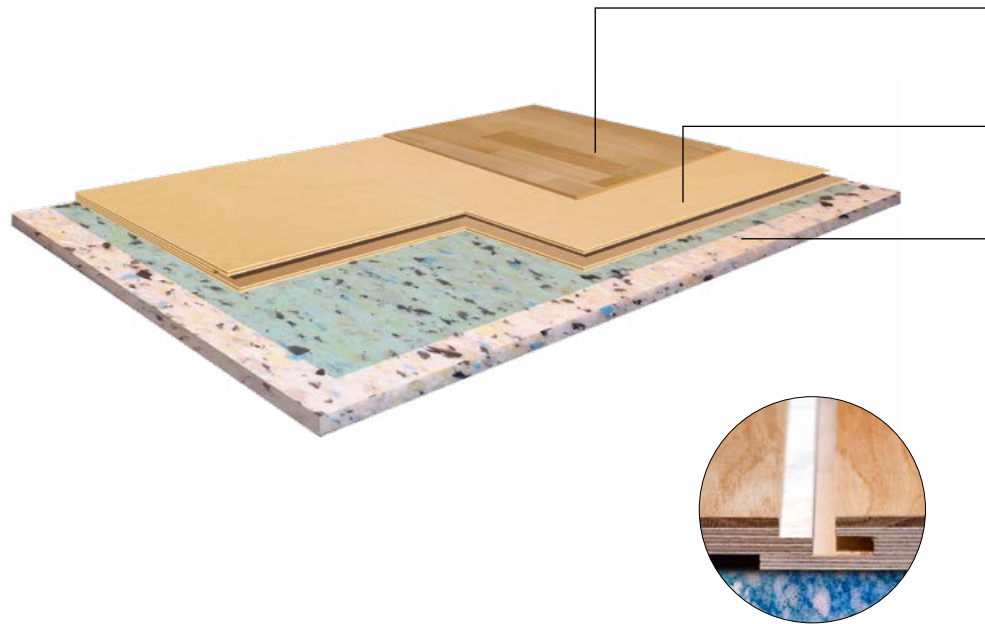

Top Layer

Wood Species: hard maple and oak
3.6 mm parquet wear layer in shipdeck design, factory sealed

Middle Layer

15 mm birch special plywood according with EN 13986 - EN 636-2S

Elastic Layer

18 mm composite foam, loose-lay installation

Thickness

approx. 37 mm

Module Size

L 2467 x W 590 mm (1,45 m² per module)

Weight

approx. 16 kg/m²

Certification

DIN V 18032-2:2001-04 and EN 14904:2006

Reaction to Fire Classification

Cfl-s1 EN 13501:2010

Available Wood Species




Kaiserslautern Germany



Vevey Switzerland



SPEED-LOCK Flex Panel Basic

SPORTSFLOORING PARTS+DESIGN

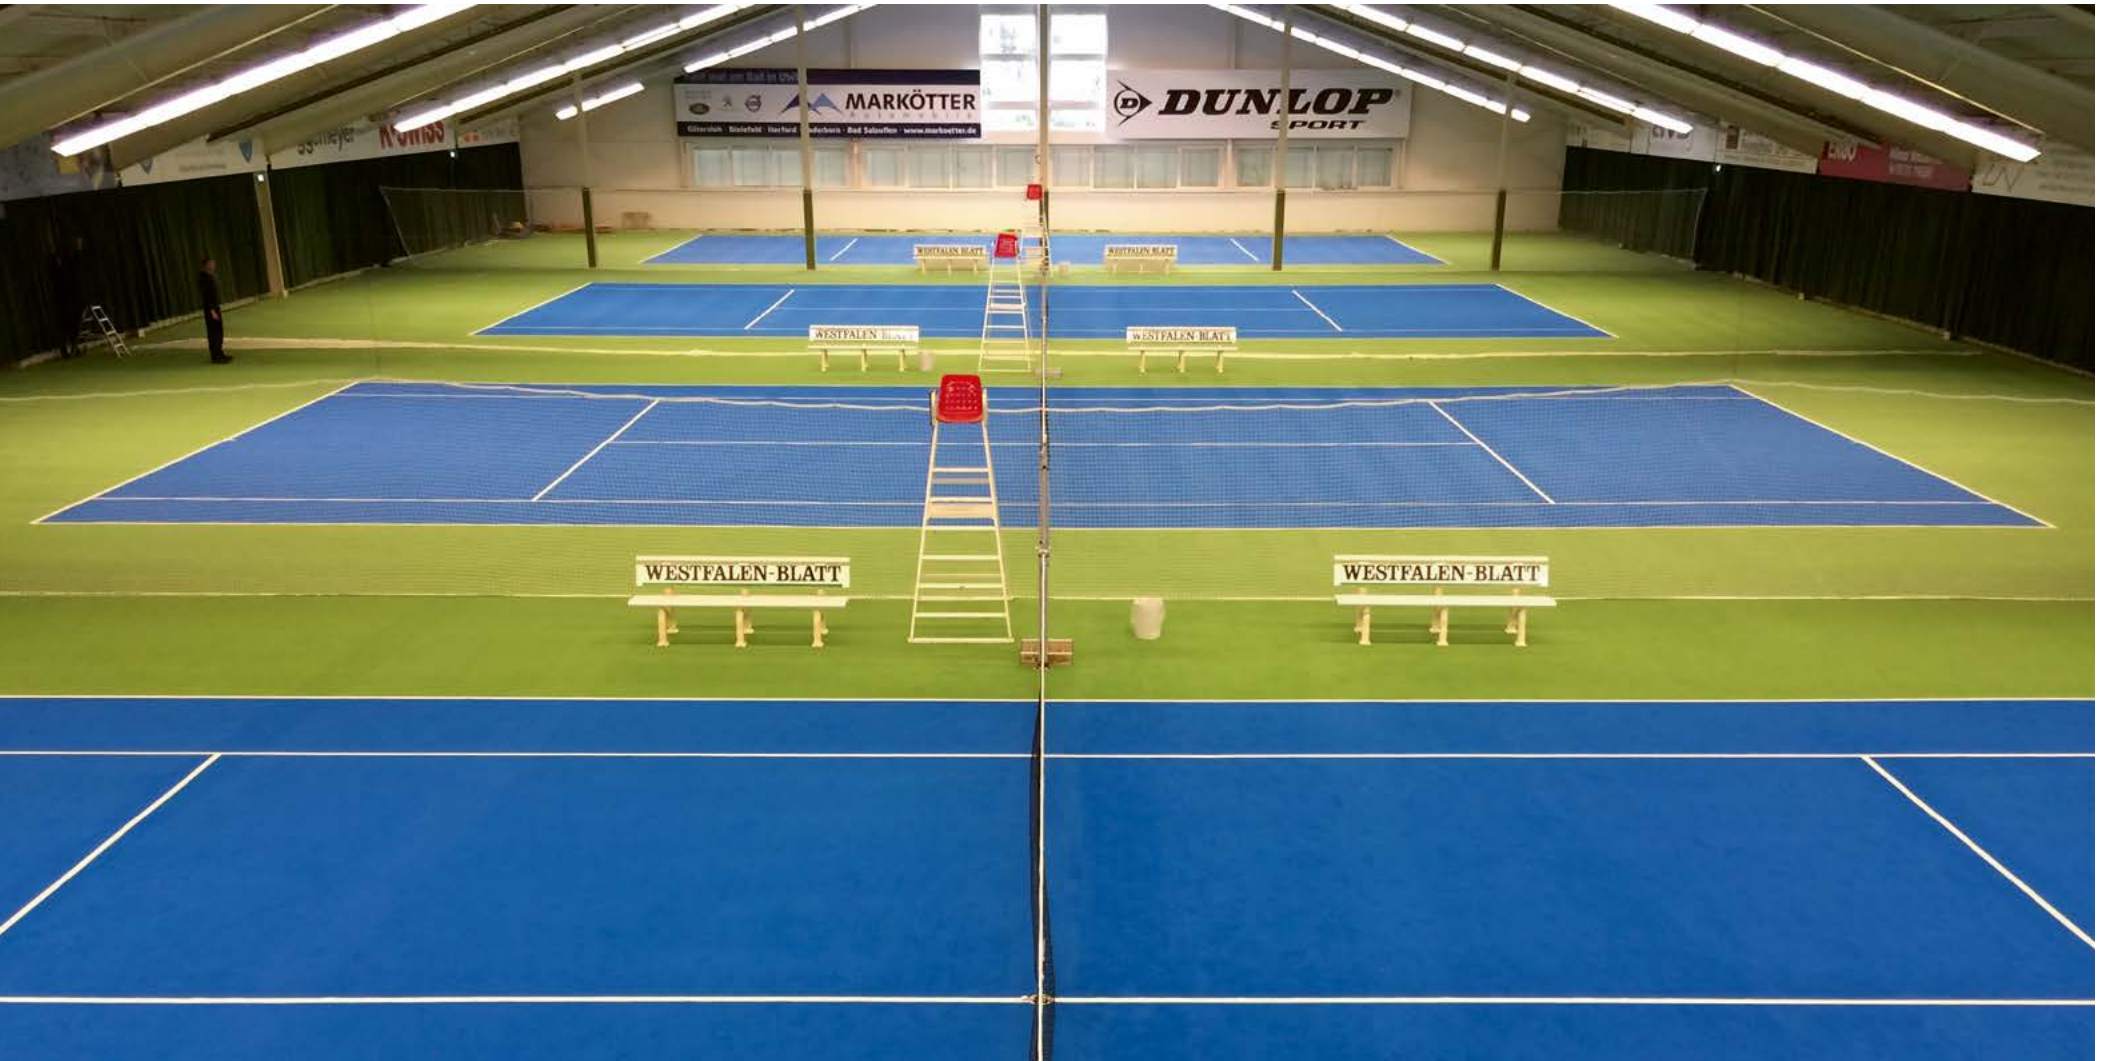


Speed-Lock Flex Panel Basic

Flex Panel Basic is a high-quality permanent sub-construction. Through its easy and fast installation process, Flex Panel Basic provides the perfect substructure for PVC, linoleum and PU coatings. A wide range of thicknesses and characteristics are available making Flex Panel Basic suitable for all venues.

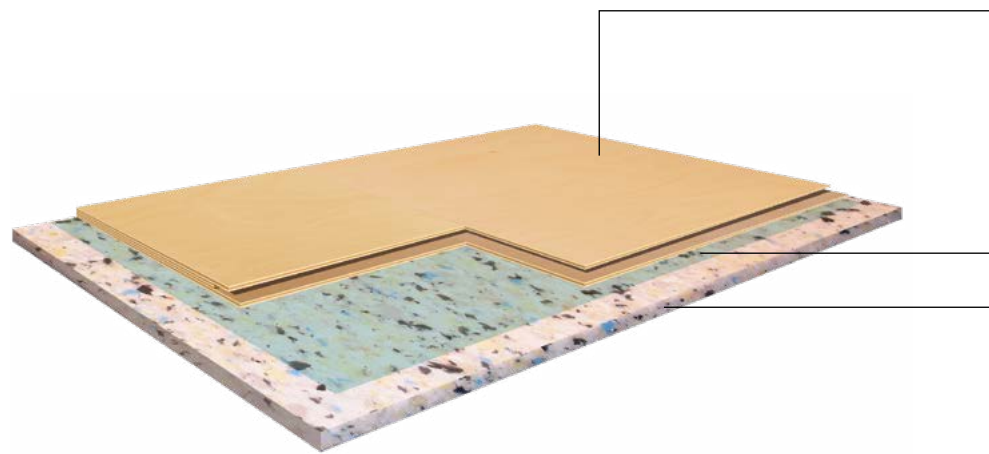

Flex Panel 27/30/33/36
foam mats, flat



Flex Panel 38/38XL
foam mats, nub pattern

Top Layer birch special plywood according

with EN 13986- EN 636-2S

Flex Panel 22 / 22 XL: 12 mm

Flex Panel 27 / 27 XL: 15 mm

Flex Panel 30 / 30 XL: 15 mm

Flex Panel 33 / 33 XL: 18 mm

Flex Panel 36: 18 mm

Flex Panel 38 / 38 XL: 18 mm

Interlayer PE foil, loose-lay installation

Elastic Layer

Composite foam, loose-lay installation

Flex Panel 22 / 22 XL: 10 mm

Flex Panel 27 / 27 XL: 12 mm

Flex Panel 30 / 30 XL: 15 mm

Flex Panel 33 / 33 XL: 15 mm

Flex Panel 36: 18 mm

Flex Panel 38 / 38 XL: 20 mm

Module Size

L 2467 x W 590 mm (1,45 m² per module)

L 2467 x W 1217 mm (3,00 m² per module) (XL-version)

Thickness

Flex Panel 22 / 22 XL: approx. 22 mm

Flex Panel 27 / 27 XL: approx. 27 mm

Flex Panel 30 / 30 XL: approx. 30 mm

Flex Panel 33 / 33 XL: approx. 33 mm

Flex Panel 36: approx. 36 mm

Flex Panel 38 / 38 XL: approx. 38 mm

Weight

Flex Panel 22 / 22 XL: approx. 9,0 kg/m²

Flex Panel 27 / 27 XL: approx. 11,0 kg/m²

Flex Panel 30 / 30 XL: approx. 11,5 kg/m²

Flex Panel 33 / 33 XL: approx. 13,5 kg/m²

Flex Panel 36: approx. 13,7 kg/m²

Flex Panel 38 / 38 XL: approx. 14,5 kg/m²



Schönbühl Switzerland

SPEED-LOCK[®]

www.speed-lock.com

manufactured by **HOLZ SPECKMANN** Germany

Holz-Speckmann GmbH & Co. KG

Weststraße 15 | 33790 Halle/Westfalen

Tel. +49(0)5201 189215 | Fax +49(0)5201 189312

info@speed-lock.com | www.speed-lock.com